


# Rolls ADB2 Active Direct Box

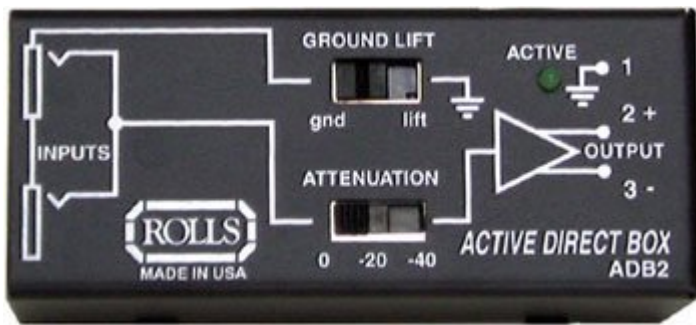

Rolls ADB2 Active Direct Box, Phantom Powered Only

The ADB2 is powered by standard microphone phantom power from 9-48 VDC and uses a discrete low-noise differential driver to make it very quiet. The ADB2 has two 1/4 inch Input jacks wired in parallel, a male XLR Output and a 3 position attenuator and ground lift switches.

ADB2 Specifications:

Input -10 to +40 dB unbal

Output -10 to +2 dB bal XLR pin 2 +

Bandwidth 1 -50K Hz

S/N 100 Db

Jacks (2) 1/4 inch phone, XLR Male

Attenuator 0 dB, 20 dB, 40 dB

Power 9 -48 V Phantom

Size 2 inches X 3.5 inches X 1.23 inches

UPC 675889000207